

## ORSOGRIL Fencing: Talía® Ventus Louvered Panels

Thanks to the specific profiles, this product brings together elegance and privacy. With its refined design and the capability to preserve privacy, Talía® Ventus represents a typical product of Italian tradition, where attention to detail is a guarantee of quality and beauty. Talía® Ventus is the only louvered fencing system certified for wind load, a characteristic the latter, granted by the post and panel integration, making the system even quicker and easier to install.

### TECHNICAL DETAILS

#### Dimensions

- Mesh 1 13/16" x 5 13/64"
- Horizontal Talía® profiles
- Vertical round bars 5/32"

#### Material

- S235JR UNI EN 10025 Steel

#### Coating

- Hot-dip galvanizing according to UNI EN ISO 1461
- Painting with polyester resins

#### Colors

- RAL 6005 green, other RAL colors available on demand

#### Fixing System

- TTQST M25/64" x 3/16" stainless steel security bolt

#### Posts

- 3 5/32" x 5/16" flat bar posts for concrete anchoring

#### Gates

- Single, double or sliding leaf gates

### APPLICATIONS


- Luxury housing
- Technical areas
- Public buildings

### PRODUCT SPECIFICATIONS


Talía® Ventus fencing consists of modular monolithic panels, 1 13/16" x 5 13/64" mesh, special section horizontal profiles (centers distance 1 13/16"), 5/32" diameter round vertical joining bars (centers distance 5 13/64").

3 5/32" x 5/16" flat bar posts welded at the ends, making up one single unit ready for installation, with per-drilled holes to fix consecutive panels. Post centers distance: 5'-4 61/64" - 6'-6 47/64"

Finish: painting with polyester resins on hot galvanized material according to UNI EN ISO 1461.

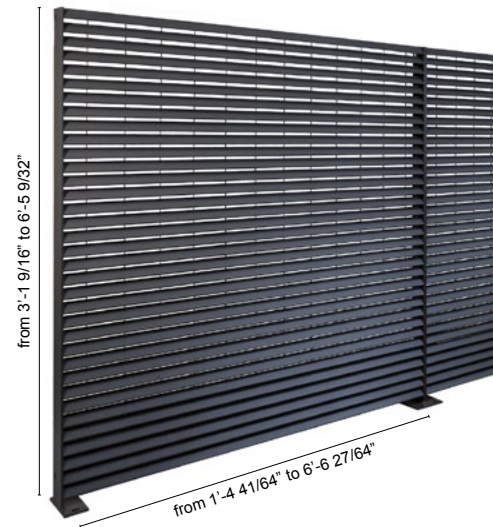

### ACCESSORIES



PANEL				POST		Post to be set in concrete		Post with base plate	
H	L	Weight		Section	Fixing points	L	Weight galv.	L	Weight galv.
inch	inch	kg/ea	kg/m²	inch	n°	inch	kg/ea	inch	kg/ea
3'-1 9/16"	5'-4 61/64"	36.9	23.5	3 5/32" x 5/16"	3	3'-11 1/4"	6.6	3'-3 13/32"	6.2
3'-1 9/16"	6'-6 47/64"	41.9	22.0	3 5/32" x 5/16"	3	3'-11 1/4"	6.6	3'-3 13/32"	6.2
5'-2 53/64"	5'-4 61/64"	60.0	22.8	3 5/32" x 5/16"	3	6'-53/64"	10.2	5'-4 11/16"	9.8
5'-2 53/64"	6'-6 47/64"	68.6	21.5	3 5/32" x 5/16"	3	6'-53/64"	10.2	5'-4 11/16"	9.8
6'-5 9/32"	5'-4 61/64"	74.1	22.9	3 5/32" x 5/16"	3	7'-6 35/64"	12.7	6'-5 9/64"	11.8
6'-5 9/32"	6'-6 47/64"	84.8	21.6	3 5/32" x 5/16"	3	7'-6 35/64"	12.7	6'-5 9/64"	11.8

