

ORSOGRIL Fencing: Recintha® 202 Wire Panels

The linearity of the mesh gives this fence a stylish look, while double horizontal wires makes it robust and secure; the system reaches its best when installed with Omega post. The Recintha® 202 maintains high security standards, whilst ensuring a pleasing look.

TECHNICAL DETAILS

Dimensions

- Mesh 200x50 mm
- Double wire: 8 mm horizontal, 6mm vertical

Material

- S235JR UNI EN 10025 galvanized Steel

Coating

- Polyester powder coating

Colors

- RAL 6005 green, other RAL colors available on demand

Fixing System

- Universal MP joint
- Cover plate with security bolts (only with Omega post)

Gates


- Single, double or sliding leaf gates

APPLICATIONS

- Industrial buildings
- Residential buildings
- Parking areas
- Airports
- Military sites

PRODUCT SPECIFICATIONS

High-resistance fencing type 202 made of electro-welded wire mesh panels, 50x200 mm opening, with double 8 mm horizontal and 6 mm vertical wires, completed by a symmetrical Omega profile post a predrilled cover plate and secured by stainless steel anti-theft bolts. Painted by thermosetting polyester powder coating. Post center-to-center distance: 2540 mm with Omega post, 2510 mm with square post section.

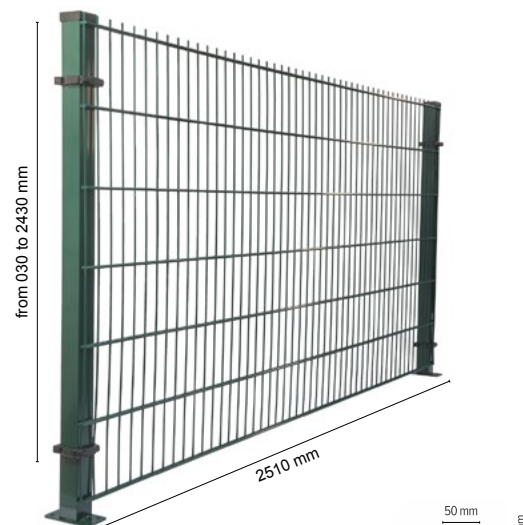


ACCESSORIES



60x60 mm
Square Post

60x40x25 mm
Omega Post



Baseplate size 50x80x4 mm
with 4 no. Ø 12 mm holes



PANEL				POST			Post to be set in concrete		Post with base plate	
H	L	Weight		Omega section	Square post	Fixing points	L	Weight galv.	L	Weight galv.
mm	mm	kg/ea	kg/m²	mm	mm	n°	mm	kg/ea	mm	kg/ea
1030	2510	22.5	8.7	60x40x25	-	6	1500	10.5	-	-
				-	60x60	3	1280	3.8	1080	3.6
1230	2510	26.9	8.7	60x40x25	-	6	1700	12.1	-	-
				-	60x60	3	1480	4.4	1280	4.2
1430	2510	31.2	8.7	60x40x25	-	6	2000	14.2	-	-
				-	60x60	3	1680	5.0	1480	4.8
1630	2510	35.6	8.7	60x40x25	-	8	2200	15.8	-	-
				-	60x60	4	1880	5.6	1680	5.4
1830	2510	40.0	8.7	60x40x25	-	8	2400	17.4	-	-
				-	60x60	4	2080	6.2	1880	6.0
2030	2510	44.3	8.7	60x40x25	-	8	2600	19.0	-	-
				-	60x60	4	2280	6.8	2080	6.6
2230	2510	48.7	8.7	120x60x30	-	10	2800	33.6	-	-
				-	-	-	-	-	-	-
2430	2510	53.1	8.7	120x60x30	-	10	3000	36.2	-	-
				-	60x60	4	2780	8.3	2480	7.8